

Marquee set up instructions



Remove Marquee frame from front of trailer deck.



Stand frame up and open so that all legs are about a meter or so apart.




Remove Marquee cover from front box and place cover over frame so that each corner of cover sit into position where velco is located on each corner.



Lift frame at yellow marked areas until frame locks into place.



Secure centre strips in all four places.

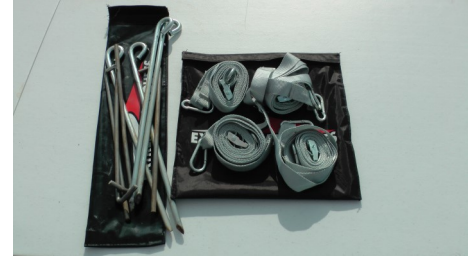

Use pegs and straps to secure Marquee in position. On hard surfaces us sand bags that are supplied.



Sand bags are also supplied to place on all four corners of marquee for when it is set up on hard surfaces.